



**Road Running Technical Council
USA Track & Field**

Measurement Certificate



Name of the course Akron Series Goodyear Half Marathon 2022 Distance 21.0975 km
 Location (state) OH (city) Akron
 Type of course: Road Race
 Measuring Methods: Bicycle
 Measured By Jane Parks, janehp3@gmail.com, 973-349-0033
 Race Contact Laura McElrath, 155 E. Voris St., Akron, OH 44311, lmcclrath@akronmarathon.org, 330-434-2786
 Date(s) when course measured: April 15 and 20, 2022
 Number of measurements of entire course: 2 Course Configuration: Point to Point
 Elevation (meters above sea level) Start 312.00 Finish 304.00 Lowest 298.00 Highest 341.00
 Straight line distance between start and finish 890m Drop 0.38 m/km Separation 4.20 %
 Type of surface: Paved 100 % Dirt 0 % Gravel 0 % Grass 0 % Track 0 %
 Effective date of certification: April 22, 2022 Certification code: OH22008JHP

Note to Race Director: Use this Certification Code in all public announcements relating to your race.

Be It Officially Noted That

Based on examination of data provided by the above named measurer, the course described above and in the map attached is hereby certified as reasonably accurate in measurement according to the standards adopted by the Road Running Technical Council. If any changes are made to the course, this certification becomes void, and the course must then be recertified.

Verification of Course --- In the event a National Open Record is set on the course, or at the discretion of USA Track & Field, a verification measurement may be required to be performed by a member of the Road Running Technical Council. If such a remeasurement shows the course to be short, then all pending records will be rejected and the course certification will be cancelled.

This certification expires on December 31 of the year: **2032**

Jane H. Parks

AS NATIONALLY CERTIFIED BY:

Date: April 22, 2022

Jane Parks - USATF/RRTC Certifier - 8606 Wiese Rd, Brecksville OH 44141
 (973) 349-0033 - janehp3+ctcert@gmail.com


Akron Series Goodyear Half Marathon 2022



Measured on the shortest possible route using the full width of the road. Restrictions noted on the following page.



USATF Certificate
OH22008JHP
Effective: 04/22/2022
Through: 12/31/2032

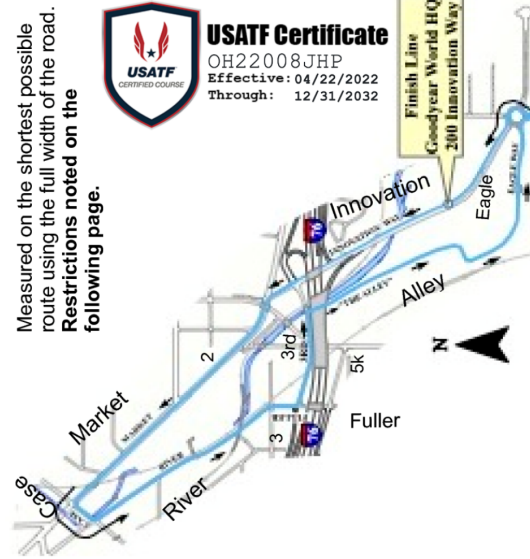

Start: On the Goodyear Proving Ground Test Track, 286 feet 3 inches south of the concrete seam in the track at the north end of the track straightaway and 114 feet 5 inches west of the edge of the track measured from the seam in the track at the small road just south of the larger side road at the center of the track. See figure.

Mile 1: On Seiberling before (south of) the roundabout, 33 feet 9 inches before (south of) the roundabout sign.

Mile 2: On E. Market St. at the tall black lamp pole on the left at the entrance to the Summa Health Care Building #1200 Entrance 4 on the right.

Mile 3: On 3rd, 102 feet after the tall Black Lamp pole on the Northeastern corner of the intersection with Fuller.

5K: On 3rd at the westernmost cross walk white line and in line with the black cross walk signal on the right at the southwestern corner of the intersection with Kelly.

Mile 4: On Seiberling before (south of) the circle 7 feet 3 inches after the large wooden utility pole BABB-E AK 138EV Line A153 on the right.

Mile 5: On Triplett after Essex St. 18 feet 8 inches after the small concrete and brick raised storm drain in the grass on the left.

Mile 6: On Delaware 66 feet after utility pole 36210 FEC owner on the left after house #2047 on the left.

10K: On Delaware just before the driveway to #2180 on the right and 8 feet 3 inches after utility pole 77463 on left.

Mile 7: On Triplett 4 feet 5 inches after the manhole in the center on the intersection with Bennett.



Mile 8: On Pauline before the intersection with Trenton in line with the fire hydrant on the right at house #325 on the right.

Mile 9: On Paxton after turn from Morrison 5 feet 6 inches before utility pole 87 FEC owned on the right.

15K: On Woolf 54 feet 8 inches before utility pole 29198 FEC Owned on the left which is at the intersection with Benton,

Mile 10: On Wedgewood before Abington an after the stream at the trailing edge of the storm drain in the sidewalk after the Acme entrance on the left and at Robert Hyer Community Learning Center on right.

Mile 11: On Hilbish in the intersection with Quayle, 24 feet 4 inches after the storm drain in the sidewalk at the northwest corner of Quayle.

Mile 12: On Seiberling at the southeastern corner of the intersection with Salem St. and 17 feet after (north of) the Salem St. sign pole.

Mile 13: On Innovation Way, 1 foot 8 inches before (south of) the tall black lamp pole on the left which is just before the parking lot entrance on the right.

Finish: On Innovation Way at the overhead walkway to #200 5 feet before (south of) the center of the cross walk light pole on the northbound side of the road and 11 feet 3 inches after (north of) the center of the large black pole for the traffic light.

Measured by Jane H. Parks
April 15 & 20, 2022
janehp3@gmail.com

Restrictions: See turn by turn descriptions for running lane restrictions listed below.

The turn from Triplett to Canton must be coned so that the runners turn from the leftmost southbound on Canton in a wide arc to the westbound lane on Albrecht.

The turn from Berne to Canton must be coned so that the runners turn from the westbound lane on Berne in a wide arc to the rightmost southbound lane on Canton going around the sewer manhole into the southbound lane.

R	Triplett Blvd	Eastbound lanes
L	Canton Rd	Southbound lanes
R	Albrecht Rd	Westbound lanes
L	Pauline	Full road
R	Ellet Ave	Full road
L	Stull Ave	Full road
L	Shelburn Ave	Full road
R	Pauline	Full road
L	Robindale	Full road
L	High Grove	Full road
R	Morrison	Full road
St	Morrison becomes Stephenson/ Paxton	Full road
L	Wolf Ave	Full road
R	Berne Ave	Full road
L	Canton Rd	Southbound Lanes
R	Wedgewood	Westbound lanes
L	Daniels	Full road
L	Hilbish	Southbound Lanes
R	Triplett Blvd	Westbound lanes
R	Seiberling	northbound lanes
R	At Traffic Circle onto Innovation	Northbound lanes
	Skybridge at Goodyear Global HQ	